DO NOT SCALE FROM THIS DRAWING

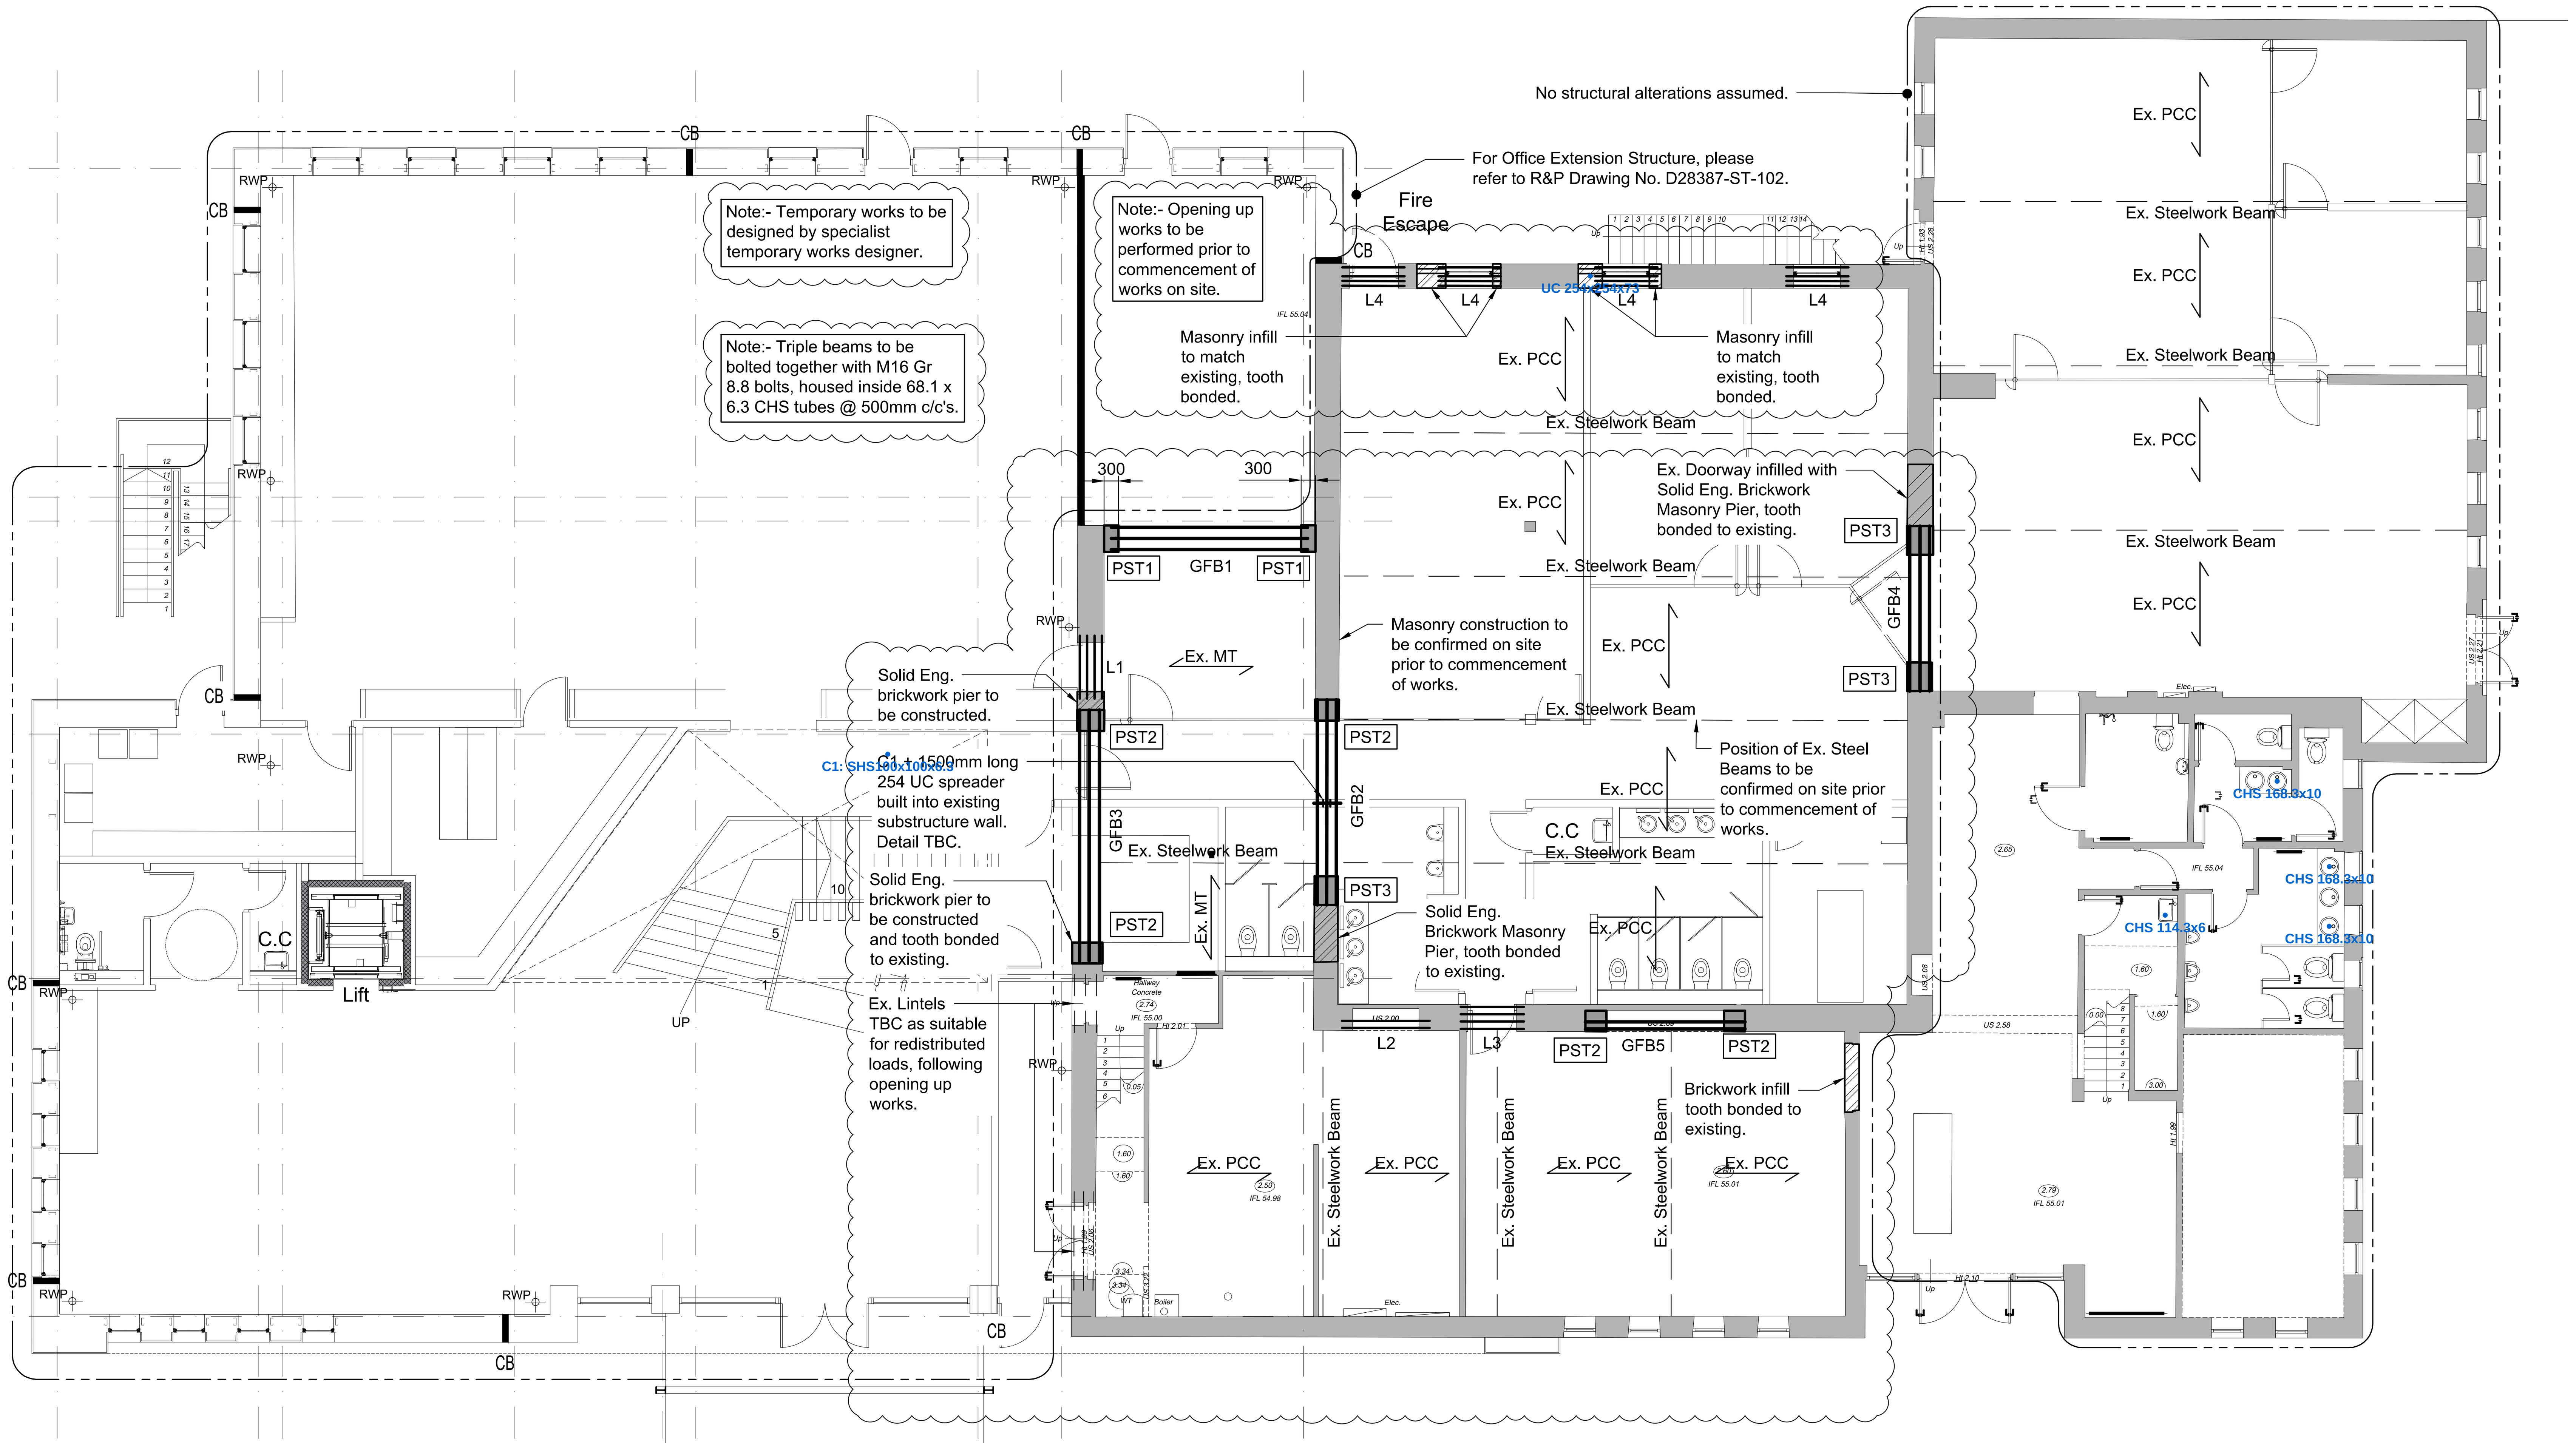


Existing - Ground Floor Plan Showing Floor Structure Above

[Scale 1:100]

| Span Schedule | |
|---|---|
| Reference | Element Description |
| Ex. PCC | Span of existing precast concrete flooring, to be investigated prior to commencement of works on site. |
| Ex. MT | Span of existing metsec flooring. |

| Steelwork Beam Schedule | |
|---|---|
| Reference | Element Description |
| GFB1 | 3no. 203 x 133 x 30 UB [S355] |
| GFB2 | 3no. 254 x 146 x 31 UB [S355] |
| GFB3 | 3no. 305 x 165 x 40 UB [S355] |
| GFB4 | 3no. 305 x 165 x 40 UB [S355] |
| GFB5 | 2no. 254 x 146 x 31 UB [S355] |

| Lintel Schedule | |
|---|---|
| Reference | Element Description |
| L1 | 4no. Naylor "R8" PCC Lintels |
| L2 | 2no. Naylor "R8" PCC Lintels |
| L3 | 4no. Naylor "R8" PCC Lintels |
| L4 | 3no. Naylor "R6" PCC Lintel + IG "L11" lintel outer leaf. |

| Padstone Schedule | | |
|---|---|---|
| Reference | Element Description | Bearing |
| PST1 | Wall Thickness x 300 x 150 Dp. MC Padstone | 150mm |
| PST2 | Wall Thickness x 440 x 215 Dp. MC Padstone | Full with 15mm Thk Bearing Plate |
| PST3 | Wall Thickness x 600 x 300 Dp. MC Padstone | Full with 15mm Thk Bearing Plate |

| Steelwork Column Schedule | |
|---|---|
| Reference | Element Description |
| C1: SHS100x100x6.3 | 203 x 203 x 46 UC [S355] |



Construction Notes:

1. General Notes:

1.1. This drawing to be read in conjunction with all relevant Architect's, Engineer's and Specialist's drawings and specifications.

1.2. Work to be carried out in accordance with current good practice, Building Regulations and subsequent amendments, the project specification, relevant British Standards and codes of practice. Materials and components to be suitable for their intended use.

1.3. For setting out refer to Architects drawings.

1.4. Contractor to check all site/building dimensions and conditions. Any discrepancies on the information given are to be reported to the Contract Supervisor prior to commencement of work.

1.5. Contractor to provide any temporary support to the existing structure, adjacent properties and adjacent ground which may be necessary to ensure their stability during the course of the works. Propping and shoring to have an adequate foundation.

2. Steelwork Notes:

2.1. Materials, fabrication and erection to be to BS5950: part 1:2000.

2.2. Steelwork to be mild steel grade S355 to BS EN10025 unless noted otherwise.

2.3. Painting of steelwork to be in accordance with the specification as follows:-

| | |
|---|---|
| Internal steelwork (gen) | G10/640/1 |
| Fire protection | G10/660/2 |
| Steelwork in cavities (gen) | G10/660/01 |
| Feature exposed | G10/660/3 |
| Feature exposed Fire Protection | G10/660/4 |
| Galvanised steelwork | G10/610/1 or G10/630/1 |

2.4. Welds to be minimum 6mm continuous fillet weld unless noted otherwise on the drawing. All welding to be in accordance with BS5135.

2.5. Connections not detailed on the drawing are to be designed by the steelwork contractor in accordance with BS5950 using forces given by the engineer.

2.6. Connections to comprise minimum 2-M20 bolt connections. Bolts to be grade 8.8 unless noted otherwise.

3. Fire Protection Notes:

3.1. Fire protection to be in accordance with Architect's detail.

4. Concrete Padstones Notes:

4.1. Concrete padstones to be grade C30 OPC 10mm aggregate, min. cement content 340kg/m3. Maximum free water cement ratio 0.60.

5. Foundation Notes:

5.1. Existing foundations assumed to be mass concrete strip foundations to a depth of minimum 700mm below external ground level.

6. Masonry Notes:

6.1. Brickwork to comply with BS EN 771-1:2003
Above DPC: 50N Engineering bricks 102mm, category i, HD units, durability against freeze / thaw: f1, active soluble salts content: S2, water absorption 7-12%, mortar designation (iii) to BS 5628-3 (i.e.1:1:6)

Below DPC: 50N Engineering bricks 102mm, category i, HD units, durability against freeze / thaw: f2, active soluble salts content: S2, mortar designation (ii) to BS 5628-3 (i.e. 1:1/2 :4 to 4 1/2)

6.2. Blockwork to comply with BS EN 771-4:2003
Above DPC: 10N/sq.mm medium dense aggregate concrete blocks (max density - 1350kg/cu.m) to architects details, mortar desiganation (iii) to BS 5268-3 [ie 1:1:6]

Below DPC: 10N/sq.mm medium dense aggregete concrete blocks (min density - 1500kg/cu.m - to comply with manual handling regulations) to architects details, mortar desiganation (ii) to BS 5268-3 [ie 1:1/2:4 to 4 1/2]

6.3. The manufacturing control of all the brickwork and blockwork must comply with clause 23.2.1 & 23.3 category 1 of BS 5628: part 1: 2005.

6.4. Cavity walls below dpc but above ground level to be tied together using ancon or similar stainless steel type ST1 at 450mm c/c's vertically and 900mm c/c's horizontally.

6.5. Weak mix concrete fill to be provided within cavities as shown on Architects drawings.

| Rev | Description | By | Chkd | Date |
|---|---|---|---|---|
| P2 | Openings revised to suit Architects latest layouts. Notes added. C1 post added. | AL | AL | 21/11/2025 |
| P1 | First preliminary issue for comment only. | SM | AL | 14/10/2025 |

Drawing Status:

PRELIMINARY

Rhodes & partners
Consulting Civil and Structural Engineers
Suite 4, Marple House, 39 Stockport Road, Marple, Stockport SK6 6BD
t: 0161 427 8388 e: office@rhodesandpartners.co.uk

Client:
BOI TRADING LTD

Project:
BOI House, Hurstwood House, Knutsford WA16 8DX

Drawing Title:
Existing Office - Ground Floor Plan showing Floor Structure Above.

| Drawn By: | Checked By: | Date: | Scale: |
|---|---|---|---|
| SM | AL | 14/10/2025 | AS NOTED @ A1 |

| Drawing No: | Revision: |
|---|---|
| D28387-ST-201 | P2 |