


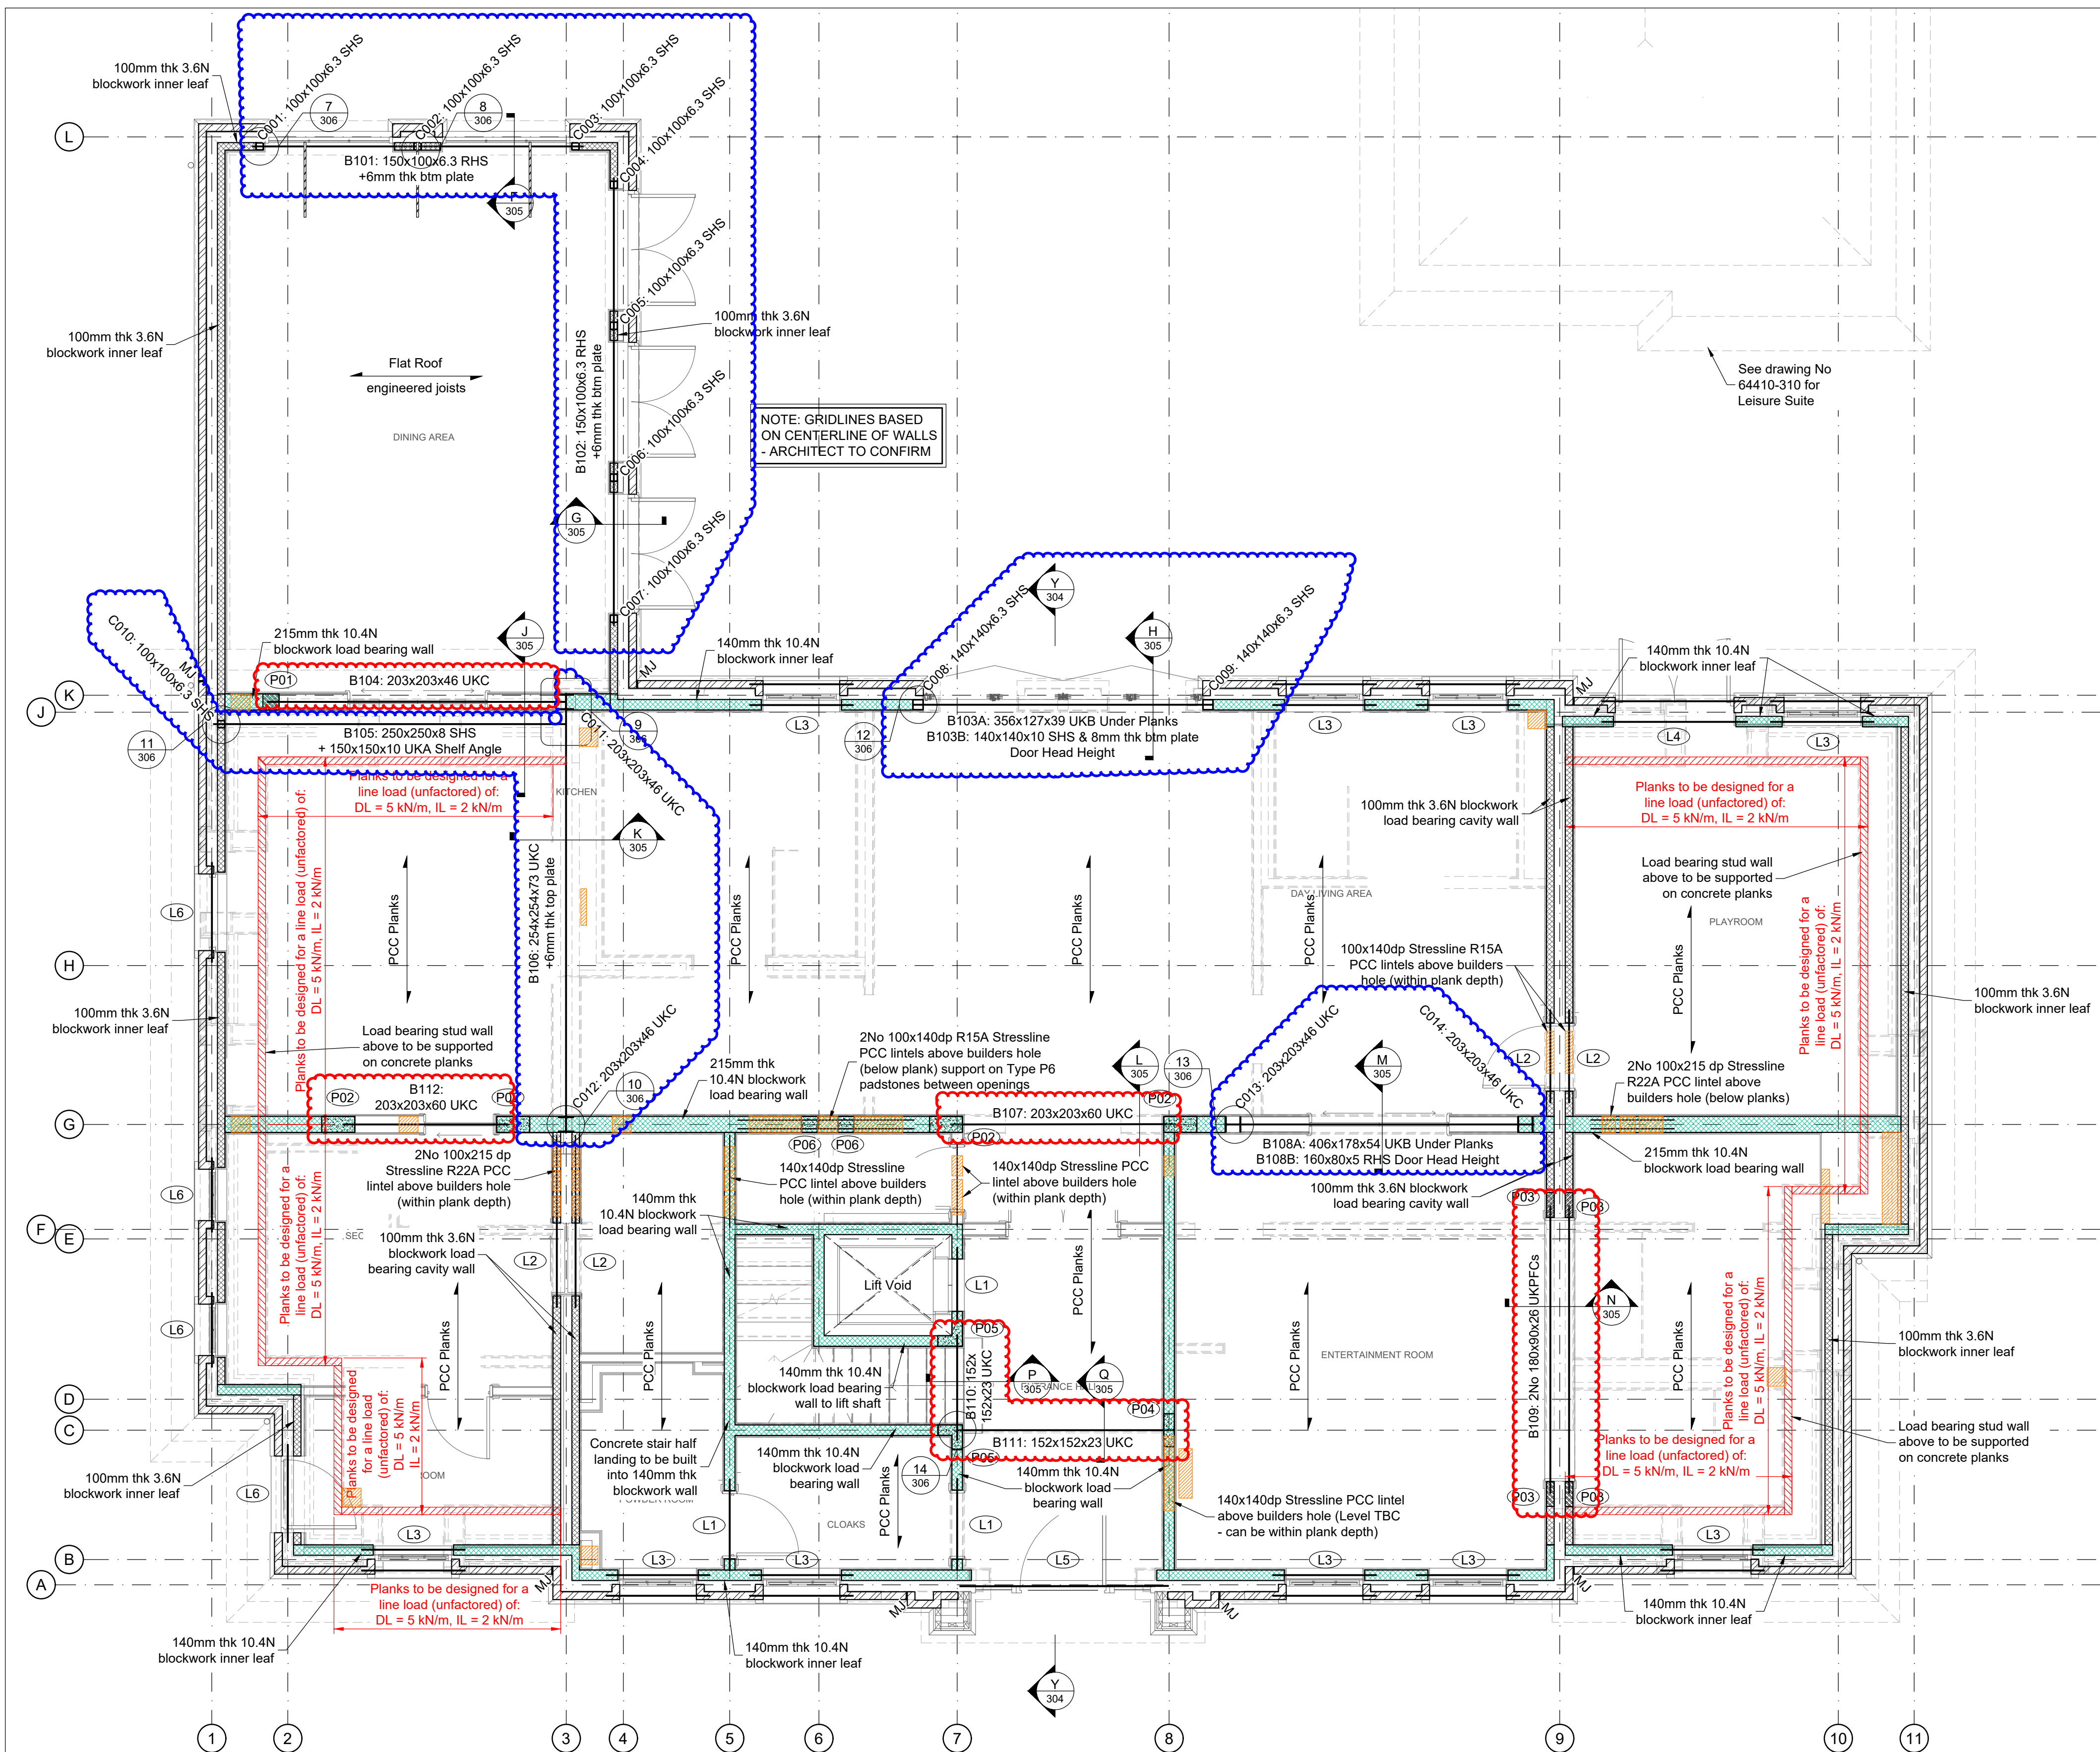

Ground Floor Plan Showing First Floor Support Structure

PCC Planks are to be designed by a specialist manufacturers. PRP to be provided with calculations and drawings at least 2 weeks prior to fabrication.

It is assumed that all builders holes, where no lintels are shown, will be positioned to underside of planks and that planks can span over - TBC on receipt of plank manufacturers drawings

Point Load (unfactored):
Dead = X.XX kN
Imposed = X.XX kN
Planks to be designed for a line load (unfactored) of:
DL = XkN/m, IL = XkN/m

Builders Hole to Consolux details
Apertures through Planks TBC by Architect / M&E contractor

- LEGEND:**
- New brickwork wall formed from clay bricks to BS EN 711-1 with a compressive strength of 20N/mm² and durability designation FN or FL in class (iii)/M4 mortar. 102.5mm thick unless noted otherwise.
 - 100mm thk (u.n.o) Aircrete blockwork wall 3.6N/mm² minimum compressive strength in Class M4 mortar (u.n.o)
 - 140 / 215mm thk (u.n.o) Aggregate concrete blockwork wall 7.3N/mm² minimum compressive strength in Class M4 mortar (u.n.o)
 - 140 / 215mm thk (u.n.o) Aggregate concrete blockwork wall 10.4N/mm² minimum compressive strength in Class M4 mortar (u.n.o)
 - MJ - Masonry Movement Joint
 - Load Bearing / Ply Sheathed Stud Wall Studs to be min 47x100dp @ 400 crs with 12mm plywood to be fixed to one side of the internal stud wall, either 3mmØ nails or 4.5mmØ screws, 50mm long @ 150mm around perimeter of ply and 300 crs internally
 - Walls / structure above
 - 30x5 MS straps @ max 2m crs fixed to min 3No joists/rafters and bent into cavity. Solid noggins to be provided at straps location.
 - PCC Planks
 - Flat Roof engineered joists
 - Rafters 1
 - Flat Roof 1 engineered joists
 - Dormer Rafters 1
 - Diagonal Brace
 - Rafters 2
 - Flat Roof 2
 - Dormer Rafters 2
 - Hip Rafters

Engineered joists and PCC Planks are to be designed by a specialist manufacturers. PRP to be provided with calculations and drawings at least 2 weeks prior to fabrication.

Lintel Key		
Type	Product reference / Material	Min Endbearing Length
L1	Stressline 140x140 dp PCC lintel (or similar) or IG Box 140	150
L2	100x140dp Stressline R15A PCC lintel (or similar) or IG Box 100	150
L3	Outer Leaf: IG L11 Inner Leaf: Stressline RW22A 140x215 dp PCC lintel (or similar) or IG HD Box 140	150
L4	Outer Leaf: IG L11 Inner Leaf: 140x140x5 SHS Beam	150
L5	IG L1/HD 150 WIL	150
L6	IG L1/S 150	150
L7	2No Stressline RW22A 140x215 dp PCC lintel (or similar) or 2No IG HD Box 140	150
All lintels to bear on full blocks		

Padstone Key			
Ref	Min Size LG x WD x DP	Material	Min bearing Length*
P01	215x215x140	Solid Class B Engineering Brick	150
P02	440x215x215	Concrete Padstone	150
P03	330x102x215	Solid Class B Engineering Brick	150
P04	440x140x140	Concrete Padstone	140
P05	330x330x140 x215 Lshaped	Concrete Padstone	140
P06	215x215x215	Concrete Padstone	215
* Unless beam perpendicular to wall or noted otherwise on plan			

CORRECT

Beam propped during floor installation, and bottom plate OR fixing provided at bearings

INCORRECT

Steel can rotate due to lack of torsional resistant

Steel sections on to padstone must be fixed with min 2No M10 resin anchors OR bottom plate to be welded to beam. Temporary props to support beam must be provided by main contractor and placed prior to fixing date of PC floor. Props to remain in place until insitu concrete infill between slab and steels has cured for a minimum of 7 days.

- Notes:**
- PRP have assumed the role of a Designer in the context of the Construction (Design and Management) Regulations and The Building Safety Act. All parties must be aware of their duties under this legislation.
 - Construction work shall not be started until designs have been approved by Building Control.
 - Do not scale from this drawing.
 - All dimensions are in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
 - Drawing shall be read in conjunction with all relevant architect's drawings. The architect shall retain overall responsibility for dimensional control. Any inconsistencies shall be reported to PRP.
 - All levels and dimensions shall be checked on site before any work commences. Setting out remains the responsibility of others.
 - Buildings shall be constructed in accordance with Approved Document A of The Building Regulations. Drainage shall be constructed in accordance with Approved Document H of The Building Regulations.
 - Temporary works shall be designed by others to BS 5975
 - Fire protective measures shall be designed by the Architect or contractor in accordance with Approved Document B of the Building Regulations
 - Waterproofing shall be designed by others in accordance with Approved Document C of the Building Regulations.
 - For more information see PRP drawings:
 - 64410 - 100Series - Drainage and External Works
 - 64410 - 200Series - Foundations
 - 64410 - 300Series - Superstructure
 - This drawing must be read together with PRP drawings: 64410 - 300 - Typical Notes and Details

T2	21/11/2025	Architects layout updated & Builders holes added. Issued for Tender	JD / HP
T1	14/11/2025	Amended to Arch comments Issued for Draft Tender	JD / HP
P3	04/11/2025	Connection markers added & minor amendments	JD / HP
P2	15/10/2025	Section markers added	JD / HP
P1	01/10/2025	Issued for comments	JD / HP
Rev	Date	Description	By / Chk

consulting engineers & surveyors

Spring Hill Office Park
Harborough Road
Pitsoford NN6 9AA

Telephone: 01604 889 870
northampton@prp.co.uk
www.prp.co.uk

Leicester
Northampton
London

engineering excellence | creating advantage

Client:	St Helens Pharmacy Ltd				
Architect:	Ascot Design				
Project:	33 Prestbury Road Wilmslow SK9 2LJ				
Title:	Superstructure Main House Ground Floor Plan				
Status:	TENDER				
Engineer:	JKT	Date:	September 2025		
Drawn:	KS	Scales @ A1:	1:50		
Checked:	HP				
Project No:	64410	Drg No:	301	Rev:	T2