


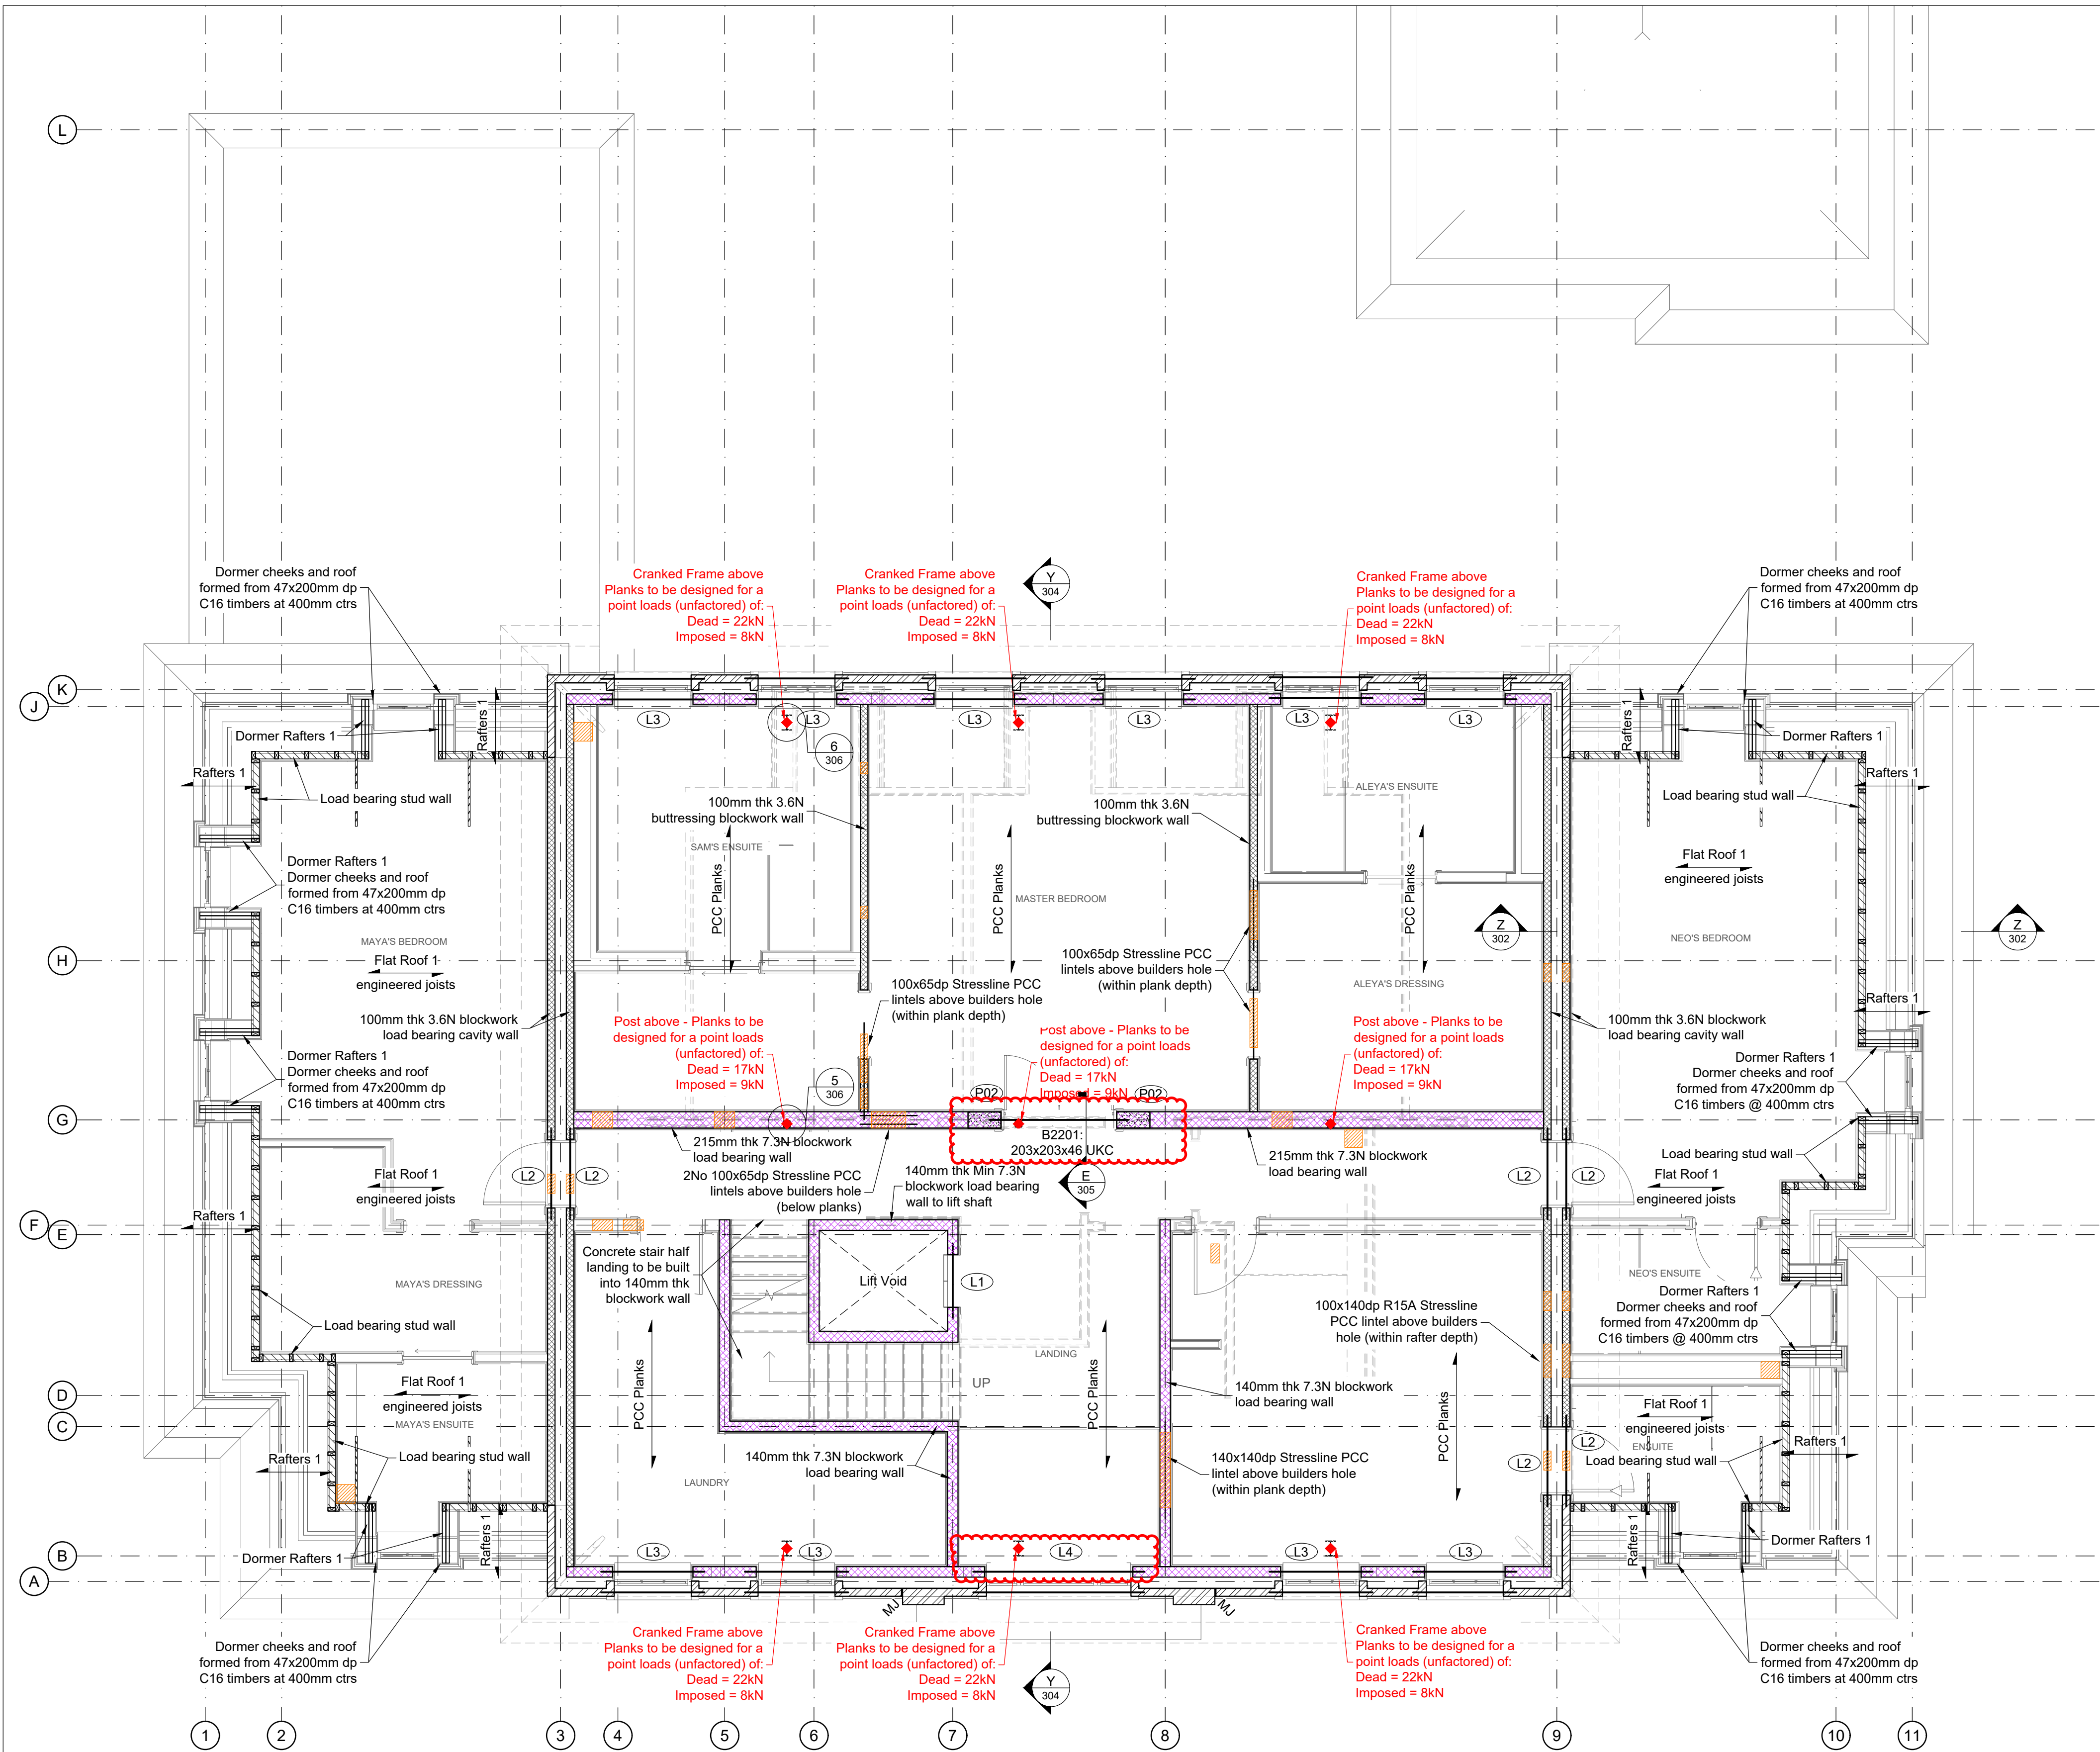

First Floor Plan Showing Second Floor Support Structure

1:50

PCC Planks are to be designed by a specialist manufacturers. PRP to be provided with calculations and drawings at least 2 weeks prior to fabrication.

It is assumed that all builders holes, where no lintels are shown, will be positioned to underside of planks and that planks can span over - TBC on receipt of plank manufacturers drawings

Point Load (unfactored): Dead = X.XX kN Imposed = X.XX kN Planks to be designed for a line load (unfactored) of: DL = XkN/m, IL = XkN/m

Builders Hole to Consolux details Apertures through Planks TBC by Architect / M&E contractor

- LEGEND:**
- New brickwork wall formed from clay bricks to BS EN 711-1 with a compressive strength of 20N/mm<sup>2</sup> and durability designation FN or FL in class (iii)/M4 mortar. 102.5mm thick unless noted otherwise.
  - 100mm thk (u.n.o) Aircrete blockwork wall 3.6N/mm<sup>2</sup> minimum compressive strength in Class M4 mortar (u.n.o)
  - 140 / 215mm thk (u.n.o) Aggregate concrete blockwork wall 7.3N/mm<sup>2</sup> minimum compressive strength in Class M4 mortar (u.n.o)
  - 140 / 215mm thk (u.n.o) Aggregate concrete blockwork wall 10.4N/mm<sup>2</sup> minimum compressive strength in Class M4 mortar (u.n.o)
  - MJ - Masonry Movement Joint
  - Load Bearing / Ply Sheathed Stud Wall Studs to be min 47x100dp @ 400 crs with 12mm plywood to be fixed to one side of the internal stud wall, either 3mmØ nails or 4.5mmØ screws, 50mm long @ 150mm around perimeter of ply and 300 crs internally
  - Walls / structure above
  - 30x5 MS straps @ max 2m crs fixed to min 3No joists/rafters and bent into cavity. Solid noggins to be provided at straps location.
  - PCC Planks
  - Flat Roof engineered joists
  - Rafters 1
  - Flat Roof 1 engineered joists
  - Rafters 2
  - Flat Roof 2
  - Dormer Rafters 1
  - Diagonal Brace
  - Rafters 2
  - Flat Roof 2
  - Dormer Rafters 2
  - Hip Rafters
- min 2No 47x200dp C16 rafters bolted together with M10 Grade 8.8 bolts @ 450mm staggered ctrs
- min 2No 47x200dp C16 rafters bolted together with M10 Grade 8.8 bolts @ 450mm staggered ctrs
- min 2No 47x200dp C16 rafters with 200x8mm thk S275 plate bolted between with M10 Grade 8.8 bolts @ 450mm staggered ctrs & 4No bolts at bearings

Engineered joists and PCC Planks are to be designed by a specialist manufacturers. PRP to be provided with calculations and drawings at least 2 weeks prior to fabrication.

| Lintel Key                         |                                                                                                     |                       |
|------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------|
| Type                               | Product reference / Material                                                                        | Min Endbearing Length |
| L1                                 | Stressline 140x140 dp PCC lintel (or similar) or IG Box 140                                         | 150                   |
| L2                                 | 100x140dp Stressline R15A PCC lintel (or similar) or IG HD Box 100                                  | 150                   |
| L3                                 | Outer Leaf: IG L11 Inner Leaf: Stressline RW22A 140x215 dp PCC lintel (or similar) or IG HD Box 140 | 150                   |
| L4                                 | Outer Leaf: IG L11 Inner Leaf: 140x140x5 SHS Beam                                                   | 150                   |
| L5                                 | IG L1/HD 150 WIL                                                                                    | 150                   |
| L6                                 | IG L1/S 150                                                                                         | 150                   |
| L7                                 | 2No Stressline RW22A 140x215 dp PCC lintel (or similar) or 2No IG HD Box 140                        | 150                   |
| All lintels to bear on full blocks |                                                                                                     |                       |

| Padstone Key                                                   |                          |                                 |                     |
|----------------------------------------------------------------|--------------------------|---------------------------------|---------------------|
| Ref                                                            | Min Size LG x WD x DP    | Material                        | Min bearing Length* |
| P01                                                            | 215x215x140              | Solid Class B Engineering Brick | 150                 |
| P02                                                            | 440x215x215              | Concrete Padstone               | 150                 |
| P03                                                            | 330x102x215              | Solid Class B Engineering Brick | 150                 |
| P04                                                            | 440x140x140              | Concrete Padstone               | 140                 |
| P05                                                            | 330x330x140 x215 Lshaped | Concrete Padstone               | 140                 |
| P06                                                            | 215x215x215              | Concrete Padstone               | 215                 |
| * Unless beam perpendicular to wall or noted otherwise on plan |                          |                                 |                     |

**CORRECT**

Beam propped during floor installation, and bottom plate OR fixing provided at bearings

**INCORRECT**

Steel can rotate due to lack of torsional resistant

Steel sections on to padstone must be fixed with min 2No M10 resin anchors OR bottom plate to be welded to beam. Temporary props to support beam must be provided by main contractor and placed 48h prior to fixing date of PC floor. Props to remain in place until insitu concrete infill between slab and steels has cured for a minimum of 7 days.

- Notes:**
- PRP have assumed the role of a Designer in the context of the Construction (Design and Management) Regulations and The Building Safety Act. All parties must be aware of their duties under this legislation.
  - Construction work shall not be started until designs have been approved by Building Control.
  - Do not scale from this drawing.
  - All dimensions are in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
  - Drawing shall be read in conjunction with all relevant architect's drawings. The architect shall retain overall responsibility for dimensional control. Any inconsistencies shall be reported to PRP.
  - All levels and dimensions shall be checked on site before any work commences. Setting out remains the responsibility of others.
  - Buildings shall be constructed in accordance with Approved Document A of The Building Regulations. Drainage shall be constructed in accordance with Approved Document H of The Building Regulations.
  - Temporary works shall be designed by others to BS 5975
  - Fire protective measures shall be designed by the Architect or contractor in accordance with Approved Document B of the Building Regulations.
  - Waterproofing shall be designed by others in accordance with Approved Document C of the Building Regulations.
  - For more information see PRP drawings: 64410 - 100series - Drainage and External Works 64410 - 200series - Foundations 64410 - 300series - Superstructure
  - This drawing must be read together with PRP drawings: 64410 - 300 - Typical Notes and Details

|     |            |                                                  |          |
|-----|------------|--------------------------------------------------|----------|
| T2  | 21/11/2025 | Builders holes added Issued for Tender           | JD / HP  |
| T1  | 14/11/2025 | Amended to Arch comments Issued for Draft Tender | JD / HP  |
| P3  | 04/11/2025 | Connection markers added & minor amendments      | JD / HP  |
| P2  | 15/10/2025 | Section markers added. Section Z moved to 304    | JD / HP  |
| P1  | 01/10/2025 | Issued for comments                              | JD / HP  |
| Rev | Date       | Description                                      | By / Chk |

consulting engineers & surveyors

Spring Hill Office Park  
Harborough Road  
Pitsoford NN6 9AA

Telephone: 01604 889 870  
northampton@prp.co.uk  
www.prp.co.uk

Leicester  
Northampton  
London

|                                                  |       |                      |
|--------------------------------------------------|-------|----------------------|
| Client:                                          |       |                      |
| St Helens Pharmacy Ltd                           |       |                      |
| Architect:                                       |       |                      |
| Ascot Design                                     |       |                      |
| Project:                                         |       |                      |
| 33 Prestbury Road<br>Wilmslow<br>SK9 2LJ         |       |                      |
| Title:                                           |       |                      |
| Superstructure<br>Main House<br>First Floor Plan |       |                      |
| Status:                                          |       |                      |
| <b>TENDER</b>                                    |       |                      |
| Engineer:                                        | JKT   | Date: September 2025 |
| Drawn:                                           | KS    | Scales @ A1:         |
| Checked:                                         | HP    | 1:50                 |
| Project No:                                      | 64410 | Drg No: 302 Rev: T2  |