
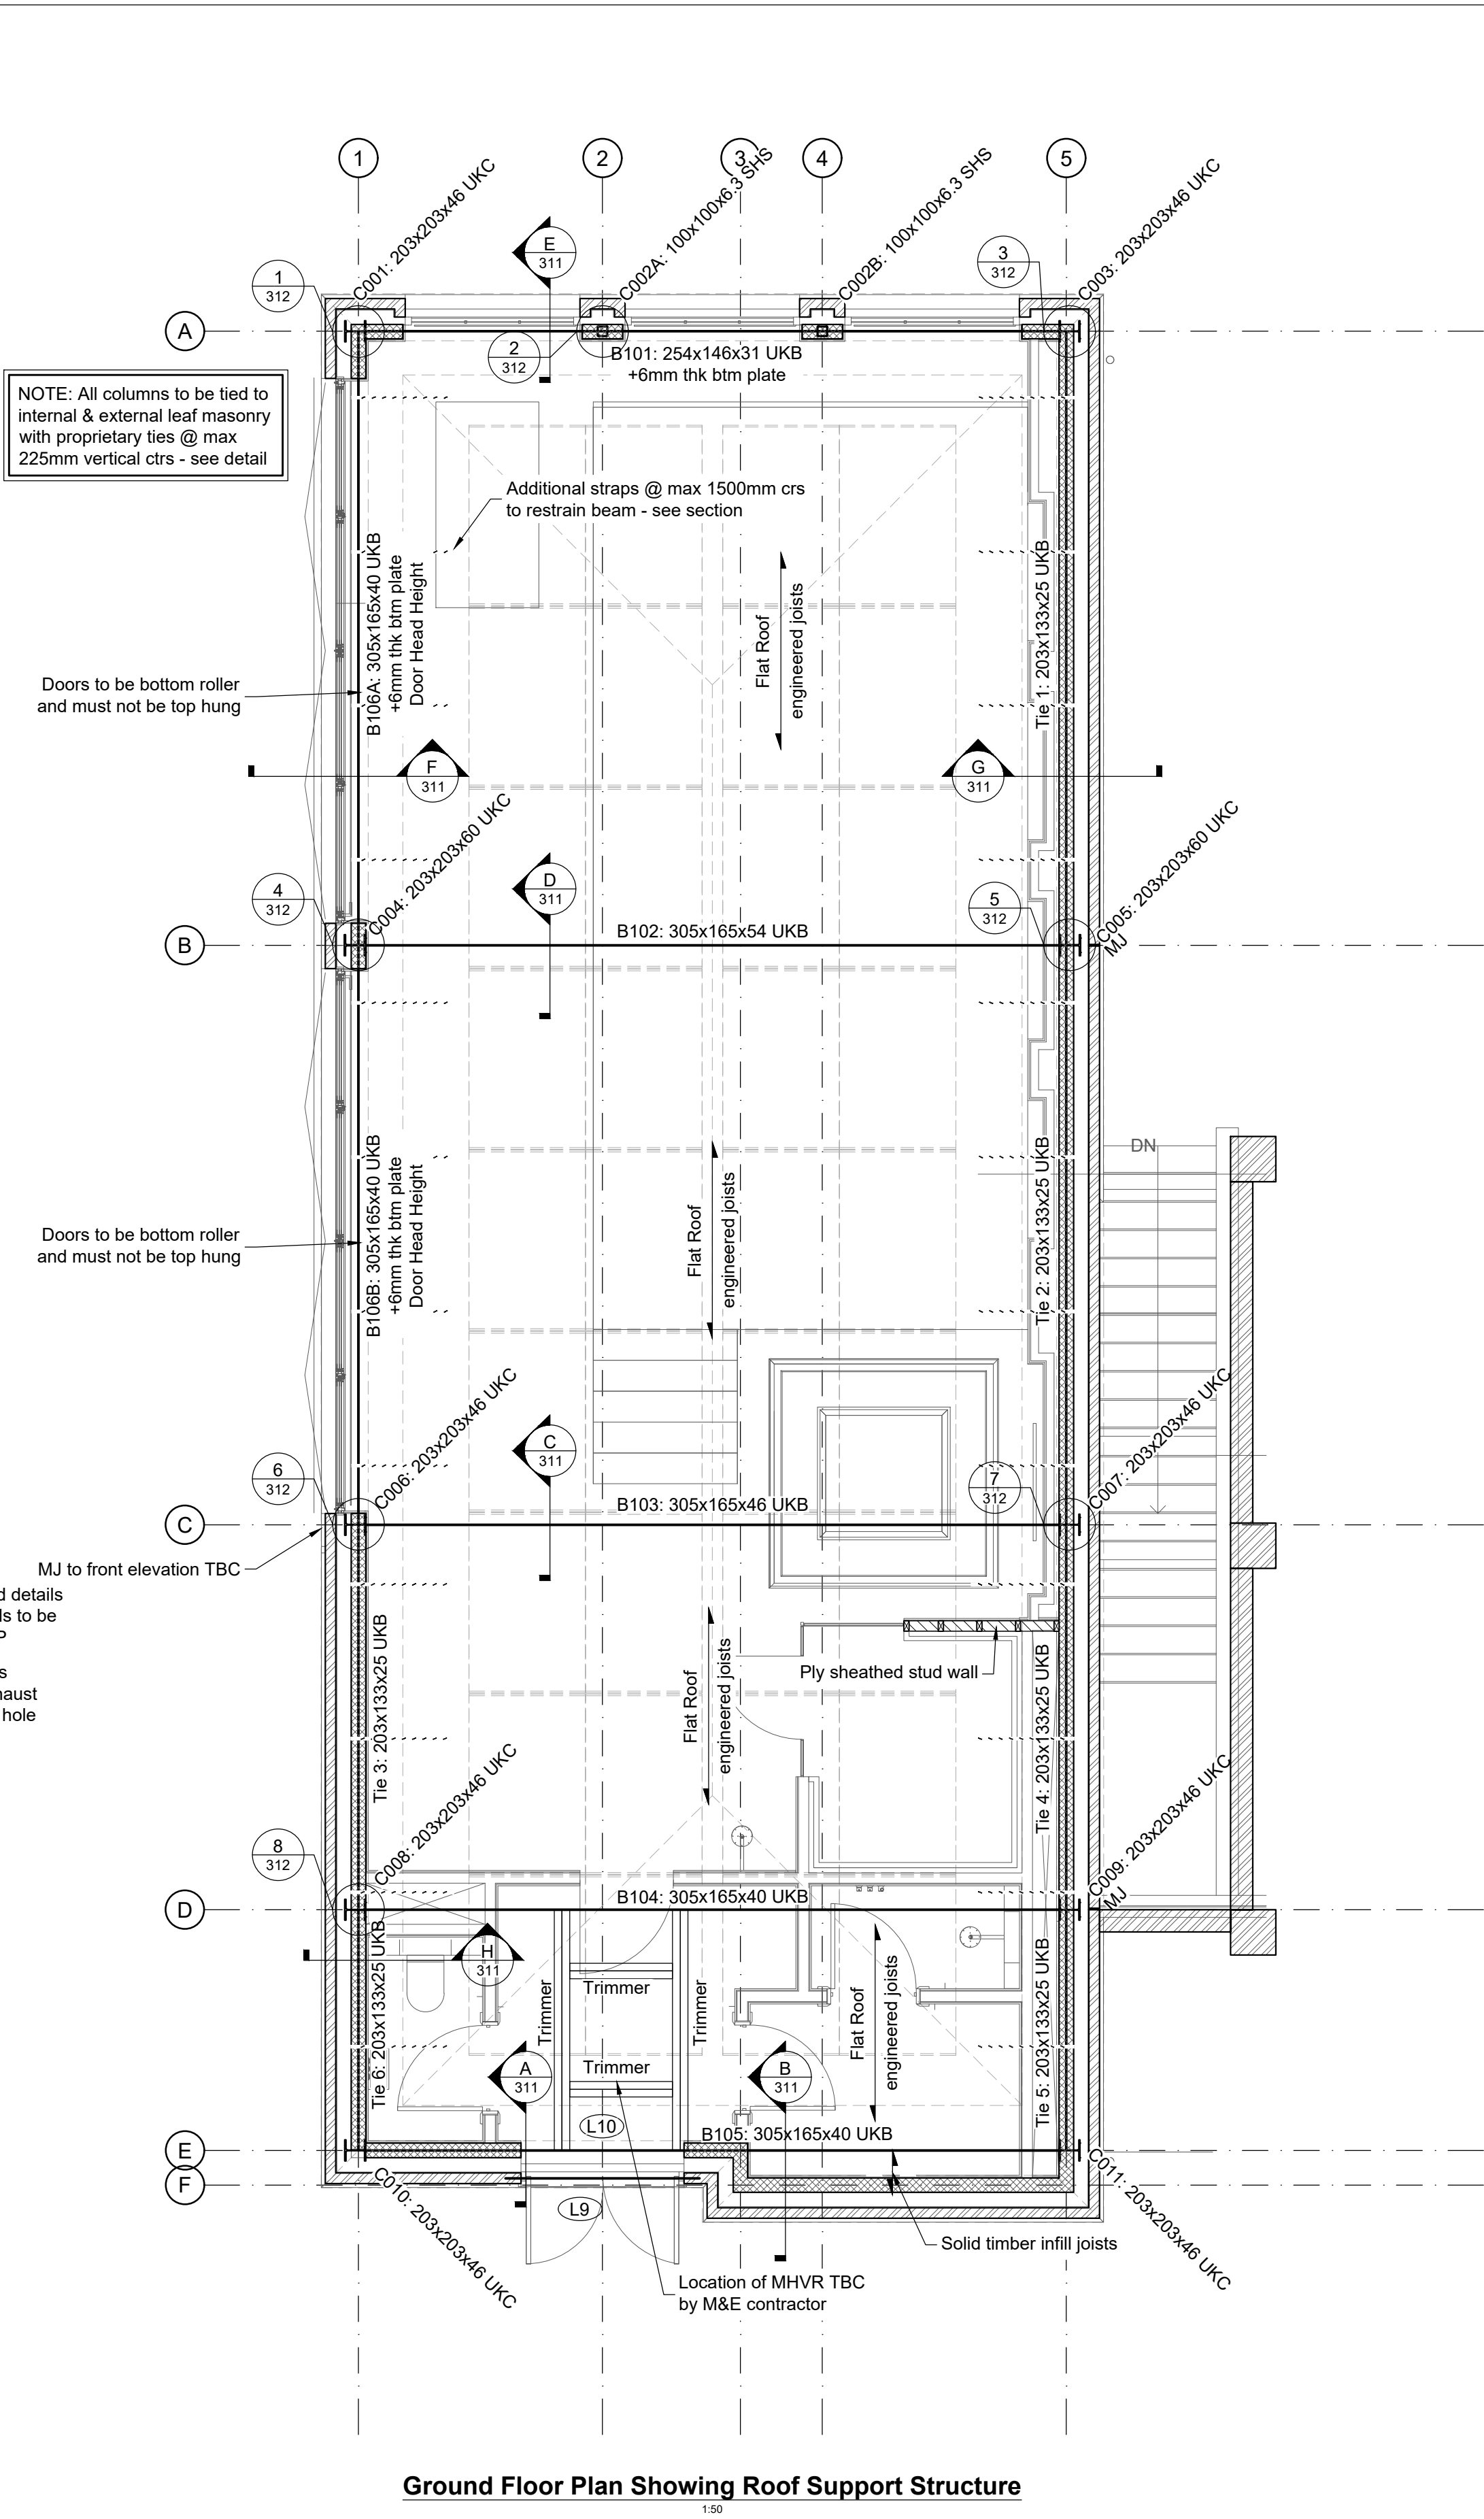


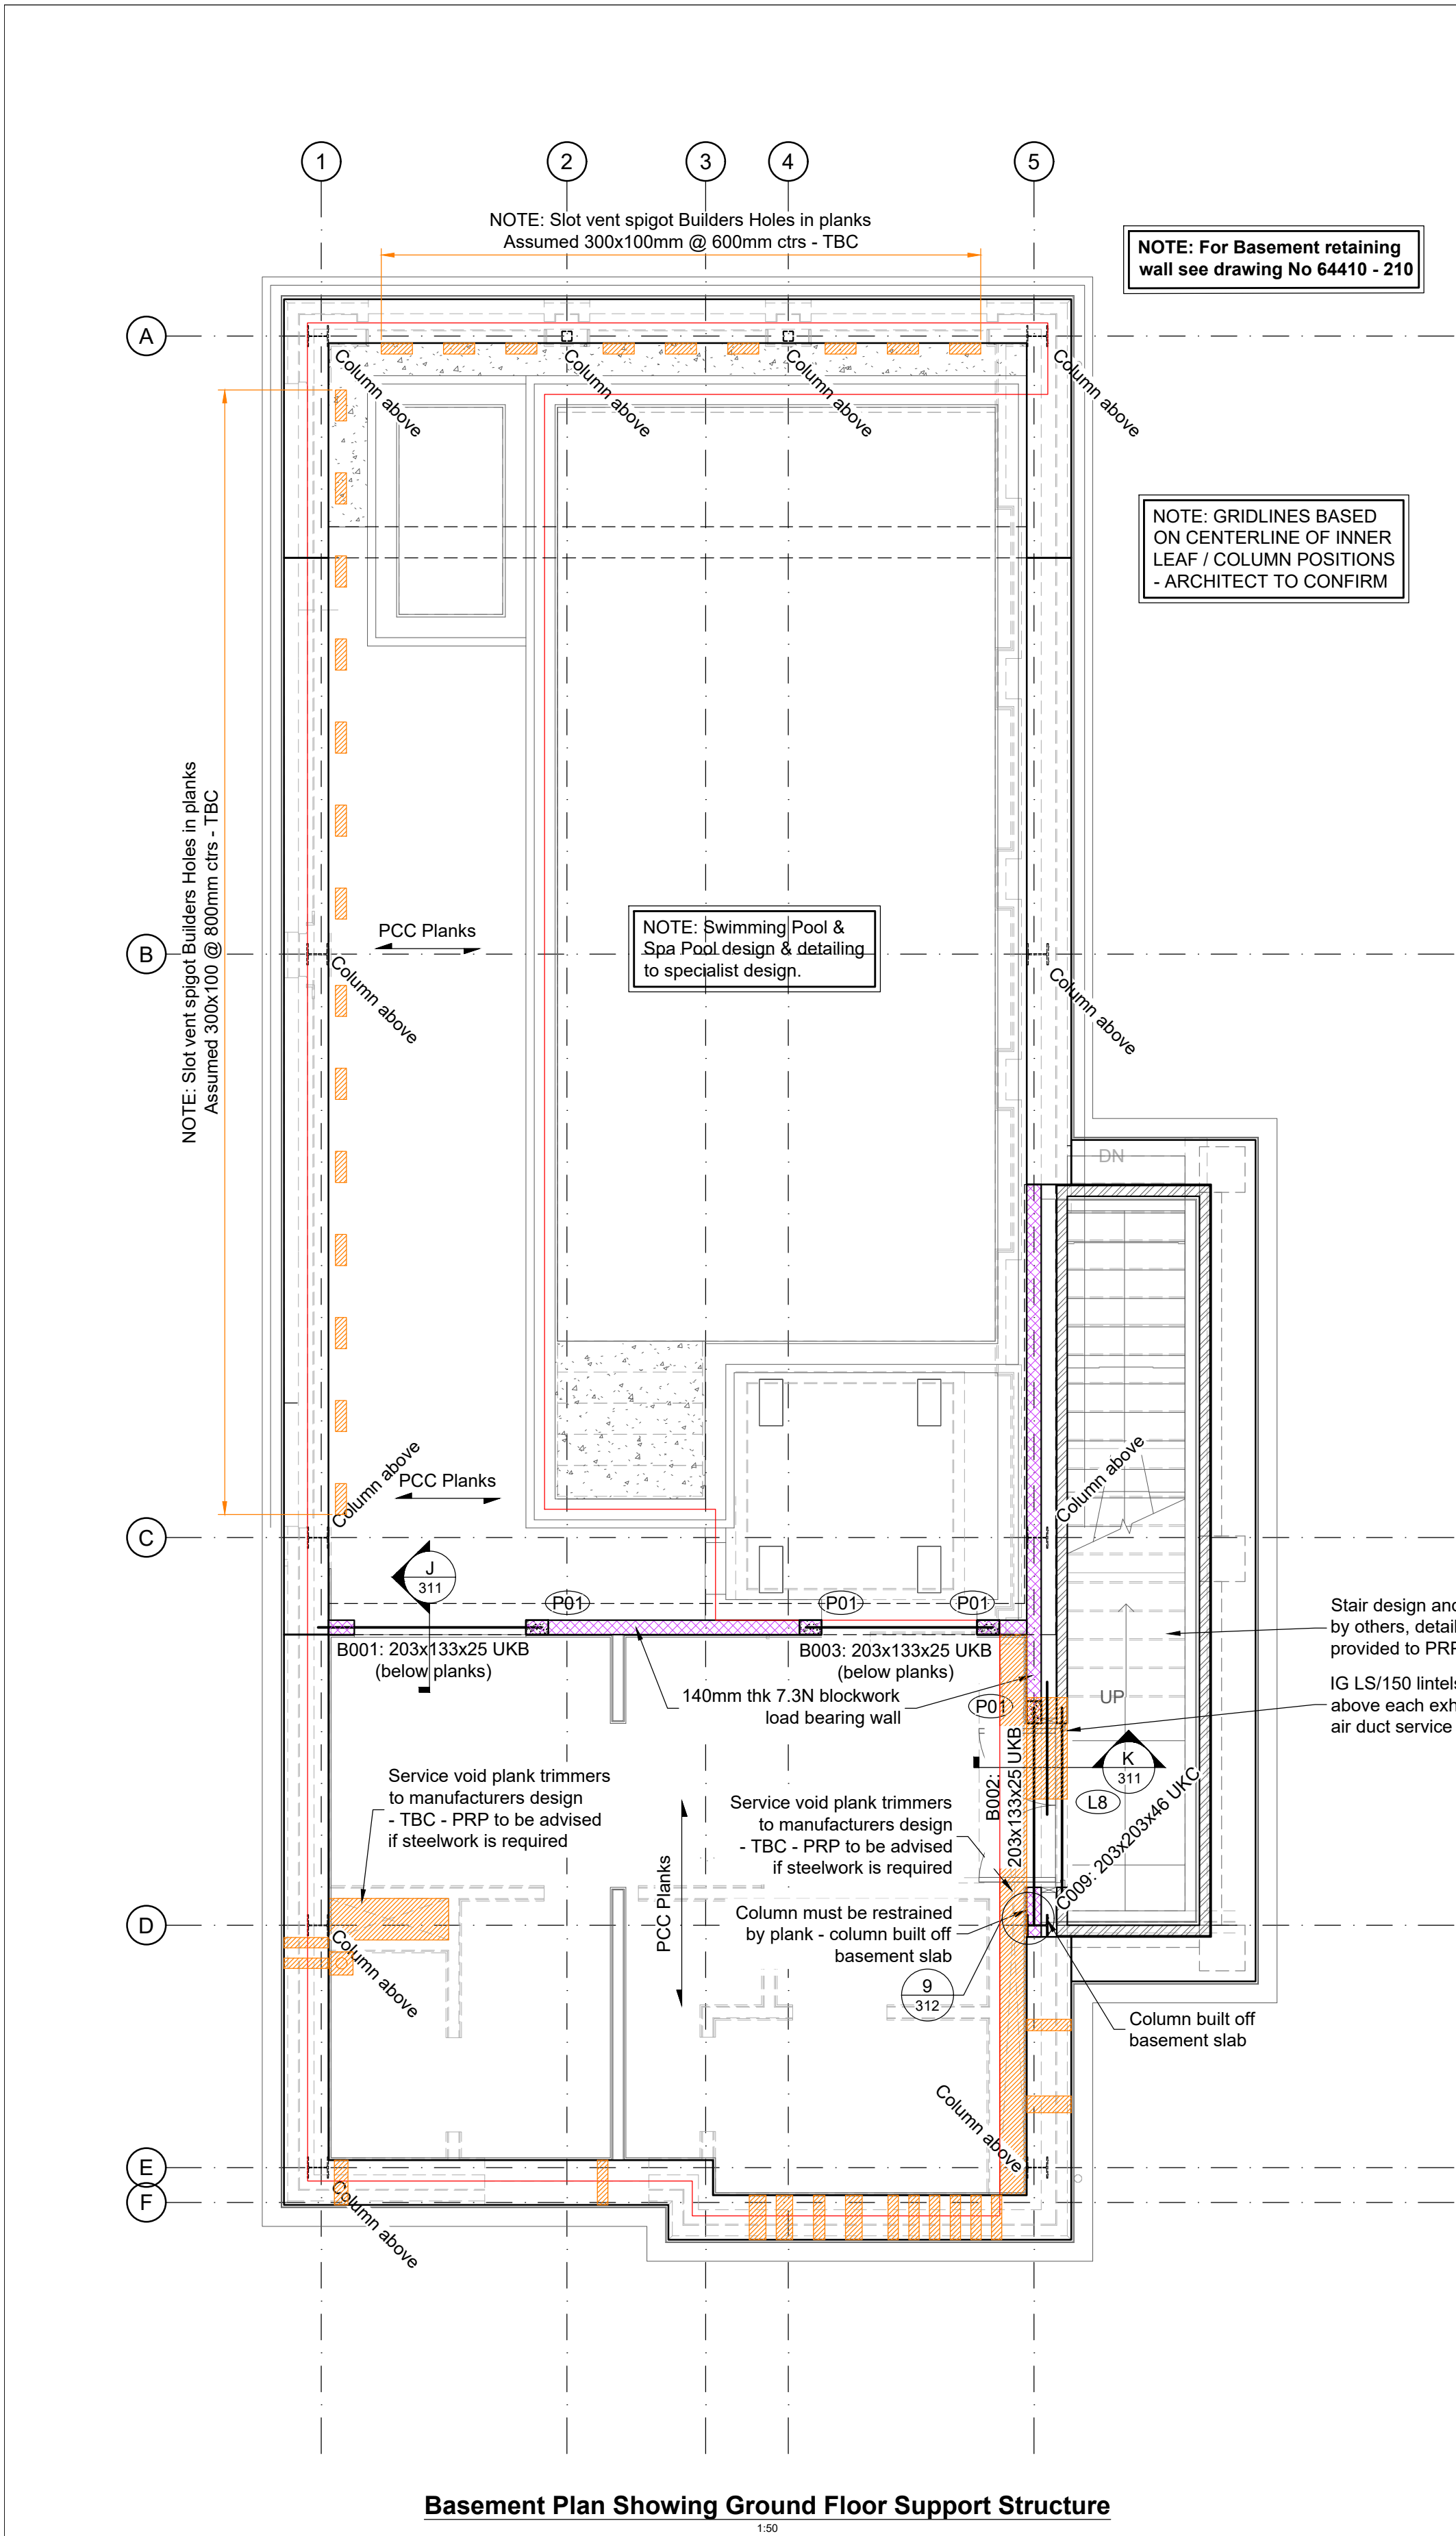

Roof Loading Criteria:		
Dead/Permanent		
Finishes, firings & Insulation	0.25kN/m²	
Plywood deck	0.20kN/m²	
Engineered Joists	By specialist (TBC)	
Ceiling Grid System	0.15kN/m²	
Plasterboard+skim	0.15kN/m²	
Services		
Service allowance	0.10 kN/m² (TBC)	
Imposed		
Allowance	0.75kN/m²	
PV System		
PV Panels	0.25kN/m² (TBC)	
Ballast Allowance	1.00kN/m² (TBC)	
PV panels & mounting ballast system design by others. PRP must be notified of loading criteria		

- LEGEND:**
- New brickwork wall formed from clay bricks to BS EN 711-1 with a compressive strength of 20N/mm² and durability designation FN or FL in class (iii)/M4 mortar. 102.5mm thick unless noted otherwise.
 - 140mm thk medium dense (1650kg/m³) Aggregate concrete blockwork wall 3.6N/mm² minimum compressive strength in Class M4 mortar
 - 140mm thk medium dense (1650kg/m³) Aggregate concrete blockwork wall 7.3N/mm² minimum compressive strength in Class M4 mortar
 - MJ - Masonry Movement Joint
 - Ply sheathed stud wall
Studs to be min 47x100dp @ 400 crs with 12mm plywood to be fixed to one side of the internal stud wall, either 3mmØ nails or 4.5mmØ screws, 50mm long @150mm around perimeter of ply and 300 crs internally. First stud to be fixed to external wall @ max 450 vertical crs to buttress external wall.
 - Walls / structure above
 - 30x5 MS straps @ max 2m crs fixed to min 3No joists/rafters and bent into cavity. Solid noggins to be provided at straps location.
 - PCC Planks
Precast hollowcore slabs to specialists design. Assumed 150mm thk
 - Flat Roof
Metal web (eco) joists to specialist manufacturer details. Assumed 75x300mm dp @ 400mm ctrs.
 - Trimmer
by joists manufacturer

Engineered joists and PCC Planks are to be designed by a specialist manufacturers. PRP to be provided with calculations and drawings at least 2 weeks prior to fabrication.

Lintel Key		
Type	Product reference / Material	Min Endbearing Length
L8	IG L11	150
L9	IG L10	150
L10	140x100dp Stressline R15 PCC lintel (or similar)	150
All lintels to bear on full blocks		

Padstone Key			
Ref	Min Size LG x WD x DP	Material	Min bearing Length*
P01	215x140x140	Concrete Padstone	150
* Unless beam perpendicular to wall or noted otherwise on plan			

- Builders Hole to Consolux & Premier Pools details
- Solid ends / infilled cores - TBC
- Loads on planks
- Point Load (unfactored): Dead = X.XX kN Imposed = X.XX kN

Apertures through Planks TBC by Architect / M&E contractor

PCC Planks are to be designed by a specialist manufacturers. PRP to be provided with calculations and drawings at least 2 weeks prior to fabrication.

- Notes:**
- PRP have assumed the role of a Designer in the context of the Construction (Design and Management) Regulations and The Building Safety Act. All parties must be aware of their duties under this legislation.
 - Construction work shall not be started until designs have been approved by Building Control.
 - Do not scale from this drawing.
 - All dimensions are in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
 - Drawing shall be read in conjunction with all relevant architect's drawings. The architect shall retain overall responsibility for dimensional control. Any inconsistencies shall be reported to PRP.
 - All levels and dimensions shall be checked on site before any work commences. Setting out remains the responsibility of others.
 - Buildings shall be constructed in accordance with Approved Document A of The Building Regulations. Drainage shall be constructed in accordance with Approved Document H of The Building Regulations.
 - Temporary works shall be designed by others to BS 5975
 - Fire protective measures shall be designed by the Architect or contractor in accordance with Approved Document B of the Building Regulations.
 - Waterproofing shall be designed by others in accordance with Approved Document C of the Building Regulations.
 - For more information see PRP drawings:
 - 64410 - 100series - Drainage and External Works
 - 64410 - 200series - Foundations
 - 64410 - 300series - Superstructure
 - This drawing must be read together with PRP drawings: 64410 - 300 - Typical Notes and Details

T2	21/11/2025	Builders holes added Issued for Tender	JD / HP
T1	14/11/2025	Amended to Arch comments Issued for Draft Tender	JD / HP
P2	15/10/2025	Section markers added & minor amendments	JD / HP
P1	01/10/2025	Issued for comments	JD / HP
Rev	Date	Description	By / Chk

PRP
consulting engineers & surveyors

Spring Hill Office Park
Harborough Road
Pittsford NN6 9AA

Telephone: 01604 889 870
northampton@prp.uk.com
www.prp.uk.com

Leicester
Northampton
London

engineering excellence | creating advantage

Client:	St Helens Pharmacy Ltd		
Architect:	Ascot Design		
Project:	33 Prestbury Road Wilmslow SK9 2LJ		
Title:	Superstructure Leisure Suite Basement & Ground Floor Plan		
Status:	TENDER		
Engineer:	CT	Date:	September 2025
Drawn:	EM	Scales @ A1:	
Checked:	HP		1:50
Project No:	64410	Drg No:	310
		Rev:	T2