


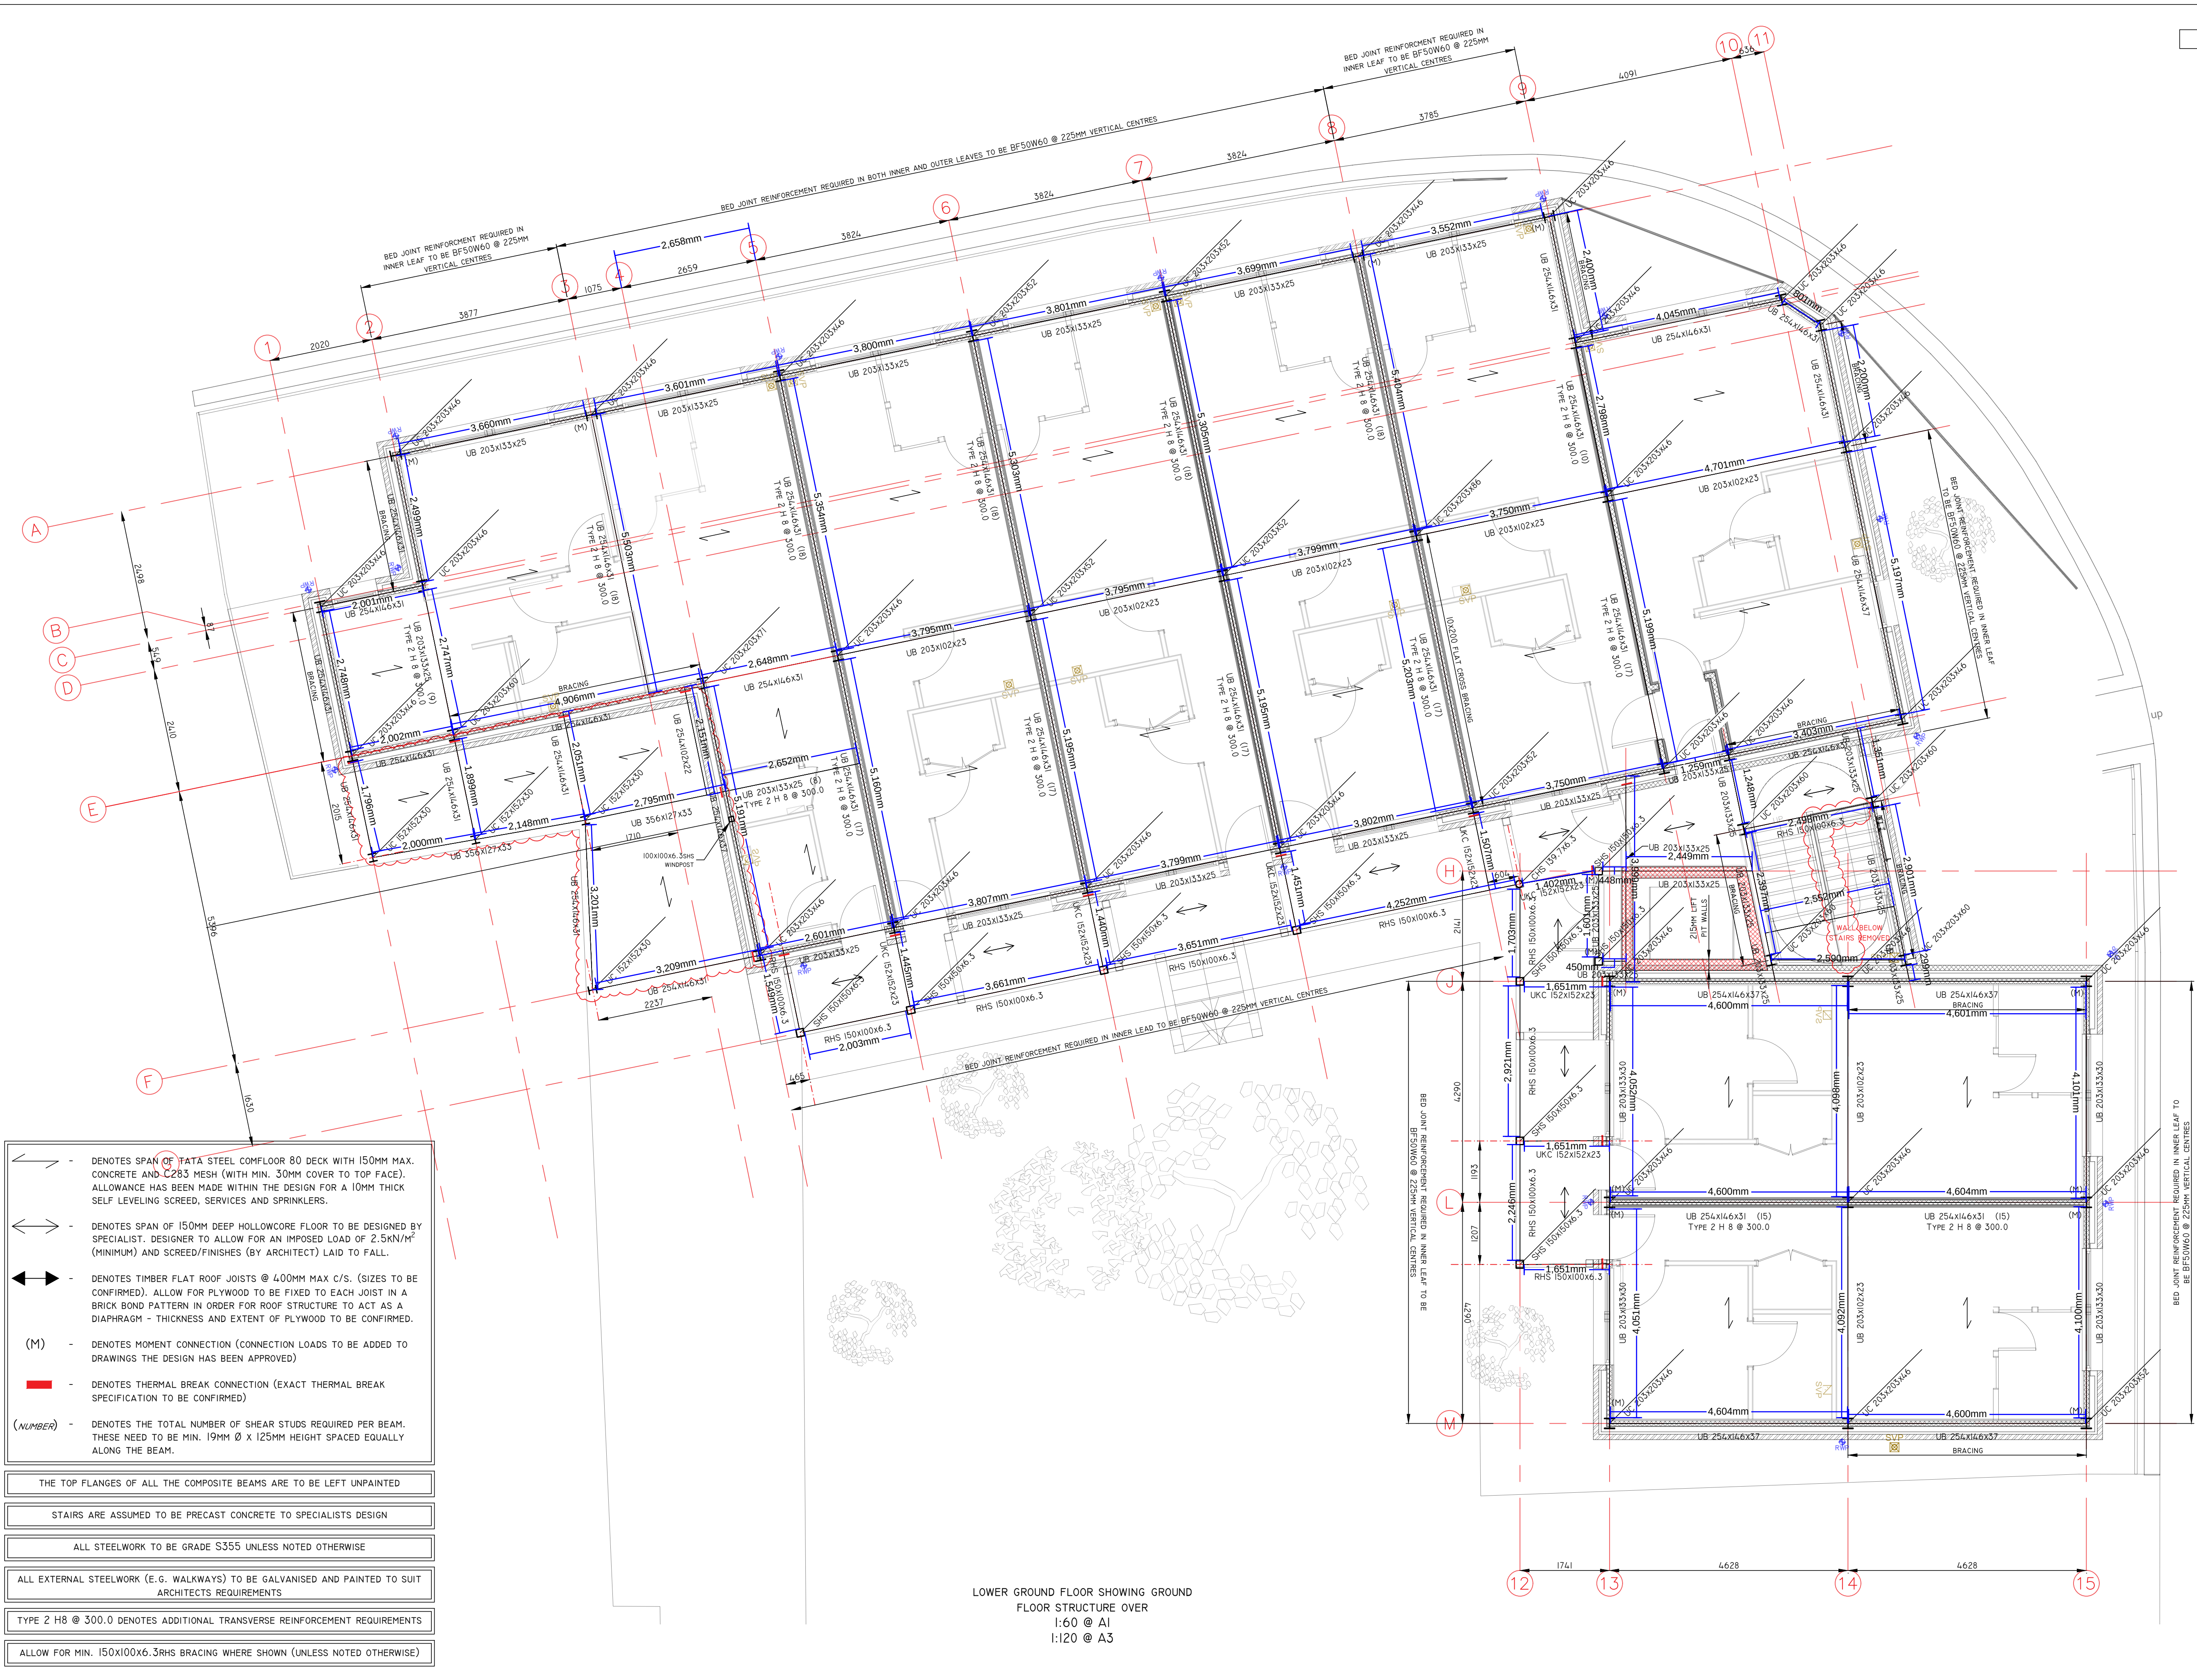

- - DENOTES SPAN OF TATA STEEL COMFLOOR 80 DECK WITH 150MM MAX. CONCRETE AND C283 MESH (WITH MIN. 30MM COVER TO TOP FACE). ALLOWANCE HAS BEEN MADE WITHIN THE DESIGN FOR A 10MM THICK SELF-LEVELING SCREED, SERVICES AND SPRINKLERS.
- ↔ - DENOTES SPAN OF 150MM DEEP HOLLOWCORE FLOOR TO BE DESIGNED BY SPECIALIST. DESIGNER TO ALLOW FOR AN IMPOSED LOAD OF 2.5KN/M² (MINIMUM) AND SCREED/FINISHES (BY ARCHITECT) LAID TO FALL.
- ↔ - DENOTES TIMBER FLAT ROOF JOISTS @ 400MM MAX C/S. (SIZES TO BE CONFIRMED). ALLOW FOR PLYWOOD TO BE FIXED TO EACH JOIST IN A BRICK BOND PATTERN IN ORDER FOR ROOF STRUCTURE TO ACT AS A DIAPHRAGM - THICKNESS AND EXTENT OF PLYWOOD TO BE CONFIRMED.
- (M) - DENOTES MOMENT CONNECTION (CONNECTION LOADS TO BE ADDED TO DRAWINGS THE DESIGN HAS BEEN APPROVED)
- - DENOTES THERMAL BREAK CONNECTION (EXACT THERMAL BREAK SPECIFICATION TO BE CONFIRMED)
- (NUMBER) - DENOTES THE TOTAL NUMBER OF SHEAR STUDS REQUIRED PER BEAM. THESE NEED TO BE MIN. 19MM Ø x 125MM HEIGHT SPACED EQUALLY ALONG THE BEAM.

- THE TOP FLANGES OF ALL THE COMPOSITE BEAMS ARE TO BE LEFT UNPAINTED
- STAIRS ARE ASSUMED TO BE PRECAST CONCRETE TO SPECIALISTS DESIGN
- ALL STEELWORK TO BE GRADE S355 UNLESS NOTED OTHERWISE
- ALL EXTERNAL STEELWORK (E.G. WALKWAYS) TO BE GALVANISED AND PAINTED TO SUIT ARCHITECTS REQUIREMENTS
- TYPE 2 H8 @ 300.0 DENOTES ADDITIONAL TRANSVERSE REINFORCEMENT REQUIREMENTS
- ALLOW FOR MIN. 150X100X6.3RHS BRACING WHERE SHOWN (UNLESS NOTED OTHERWISE)

PRELIMINARY

C	SFS TO BLOCKWORK UPDATE	18/12/25	CR
B	AMENDS	10/11/25	CR
A	AMENDS	17/10/25	CR
-	INITIAL ISSUE	26/09/25	CR
REV	COMMENTS	DATE	BY

BMC

BELL MUNRO CONSULTING LTD

CONSULTING CIVIL & STRUCTURAL ENGINEERS
TURNING HOUSE
5 ARCHWAY
MANCHESTER
M15 5RL
TEL: 0161 2098032
FAX: 0161 2098033
EMAIL: CONSULTING@BELLMUNRO.CO.UK
WWW.BELLMUNRO.CO.UK

CLIENT: OLLIER SMURTHWAITE

PROJECT: SEATON HOUSE

TITLE: LOWER GROUND FLOOR
SHOWING STRUCTURE OVER

DRAWN BY: CR
CHECKED BY: AM
SCALE: AS SHOWN
DATE: 09/25

REVISION: C